

### General Product information

This product is suitable for indoor dry locations only.


The corded version of this product requires the use of the supplied 12VDC power supply. **DO NOT CONNECT DIRECTLY TO LINE VOLTAGE!!!**

Mount hardwire version to 4" square junction box with 3" round plaster ring.


NOTE: This fixture is dimmable only using the knob on the front of the fixture. Do not connect it to a dimmable AC circuit.

#### CAUTION - RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN POWER OFF TO THE JUNCTION BOX**

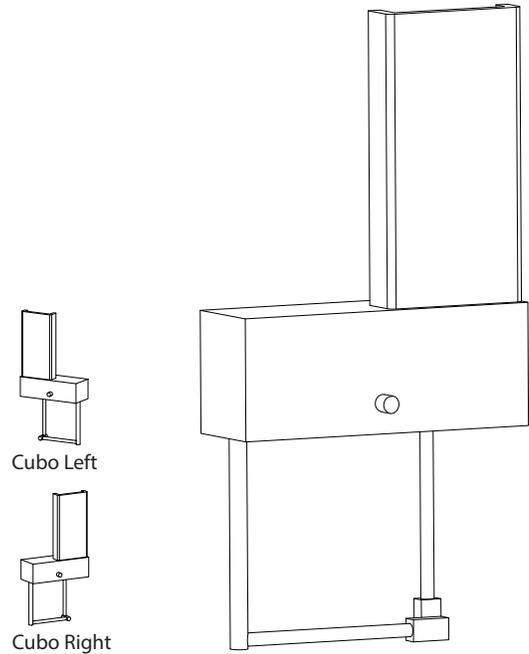


### Where to mount the Cubo bedside

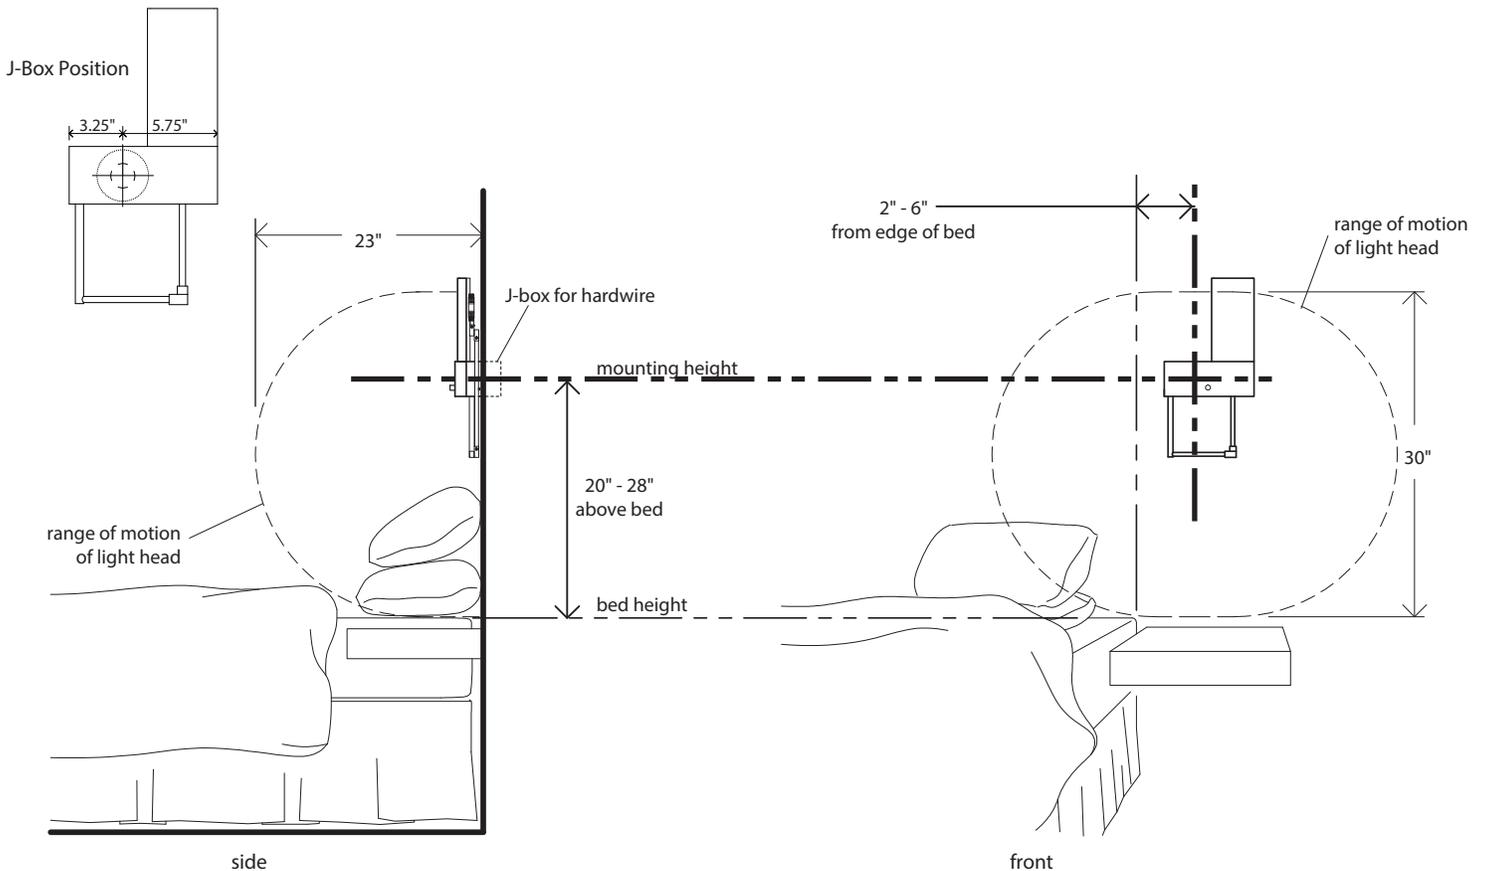

NOTE: dimensions are only recommendations for optimal bedside operation. The cubo is appropriate for other installation locations as well.

### How to mount the Cubo

Note: For conversion kit installation instructions to hardwire the fixture to your home's standard line voltage, see following page.

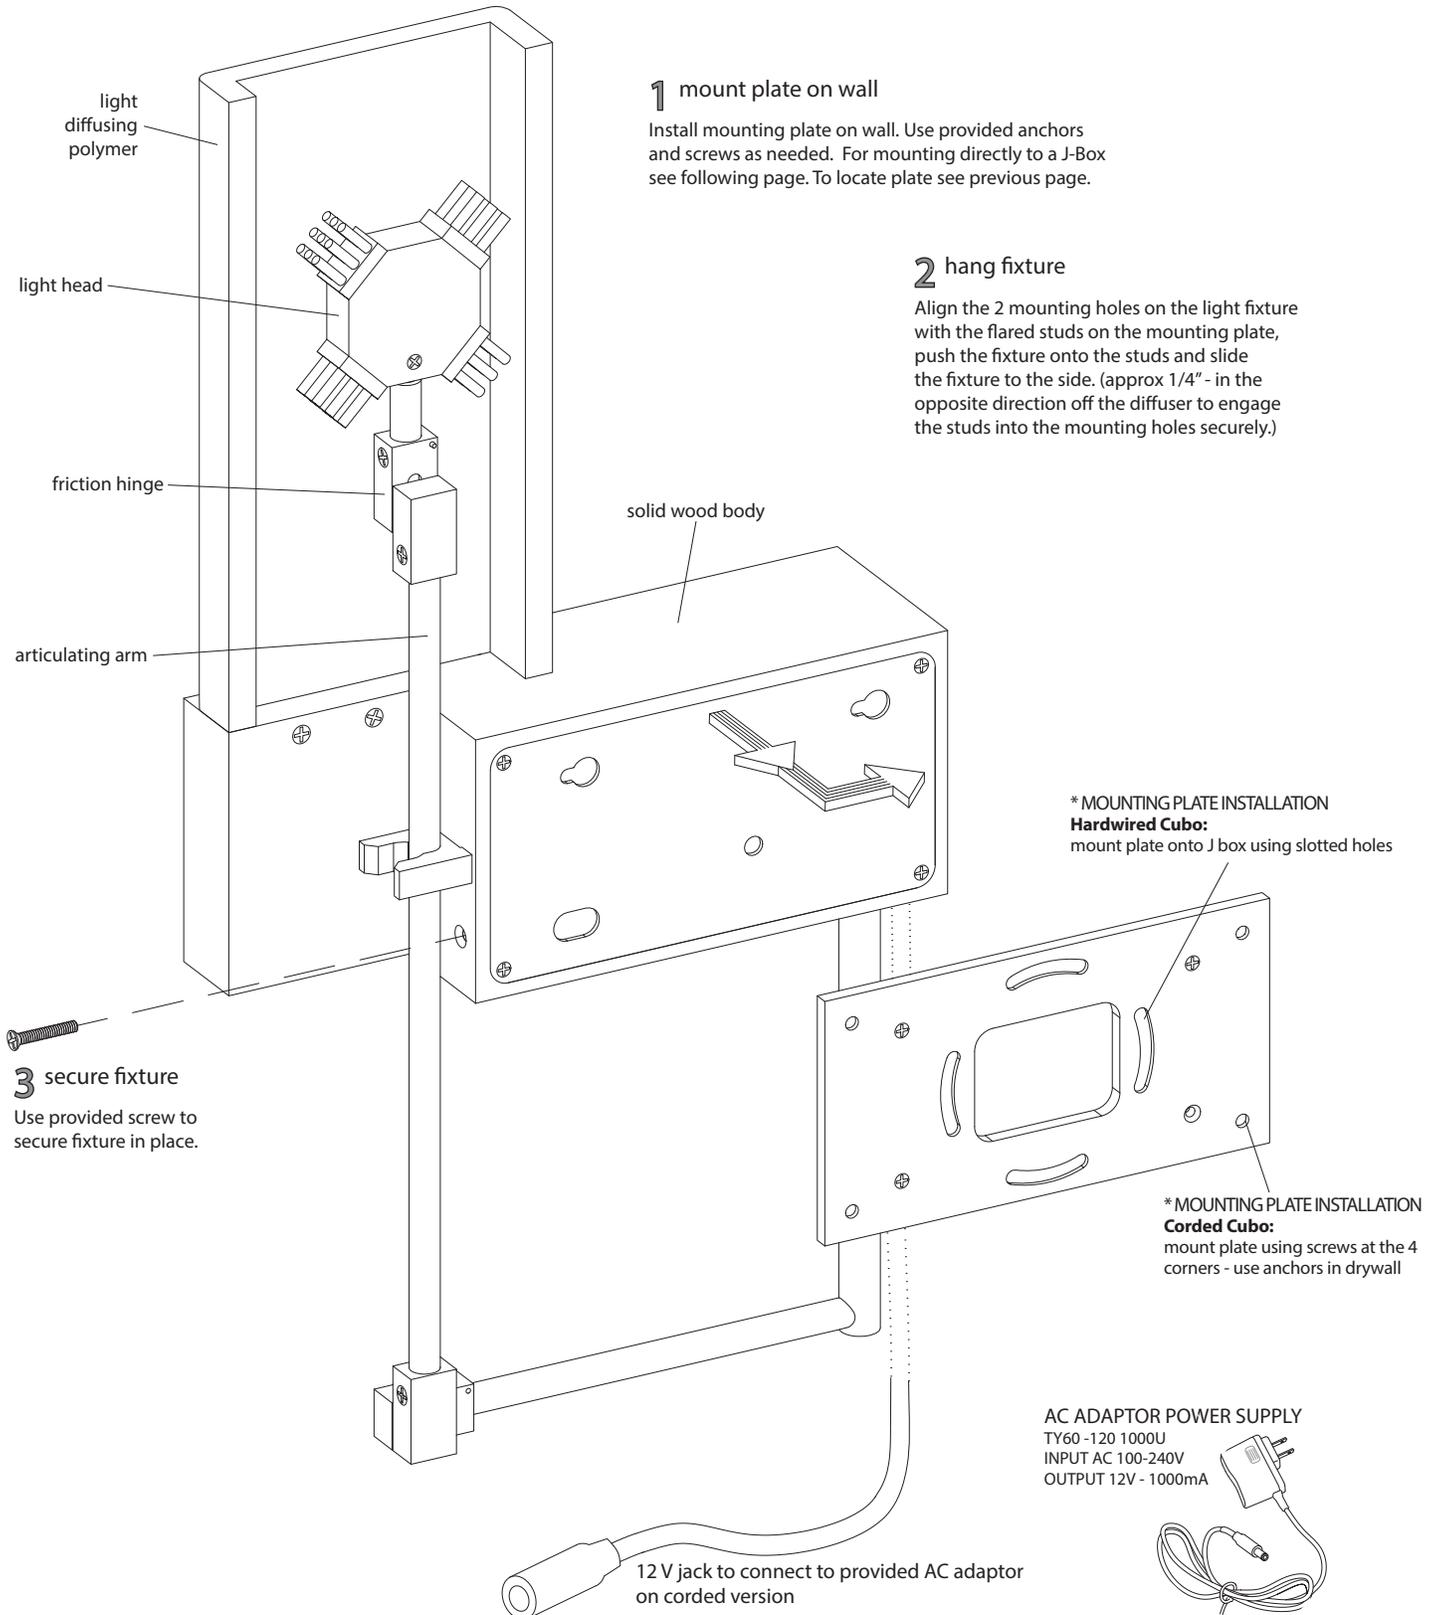


## How to hardwire install the Cubo

\*\*Hardwired installation should be performed by a licensed electrician.

\*\*Make sure that the circuit breaker is off before proceeding with installation.

1. Install a standard junction box in the wall. Use the illustration on the previous page to position the junction box.
2. Connect the included 12V DC power supply to the 110V line voltage.
3. Attach the mounting plate to the plaster ring on the junction box using the supplied screws. Level the plate and tighten the screws.
4. Connect the 12V DC leads that are coming out of the rear of the cubo fixture to the power supply. Follow the labeling on the power supply/wires.
5. Stuff the excess wire into the junction box and follow steps 2 and 3 from the previous page.

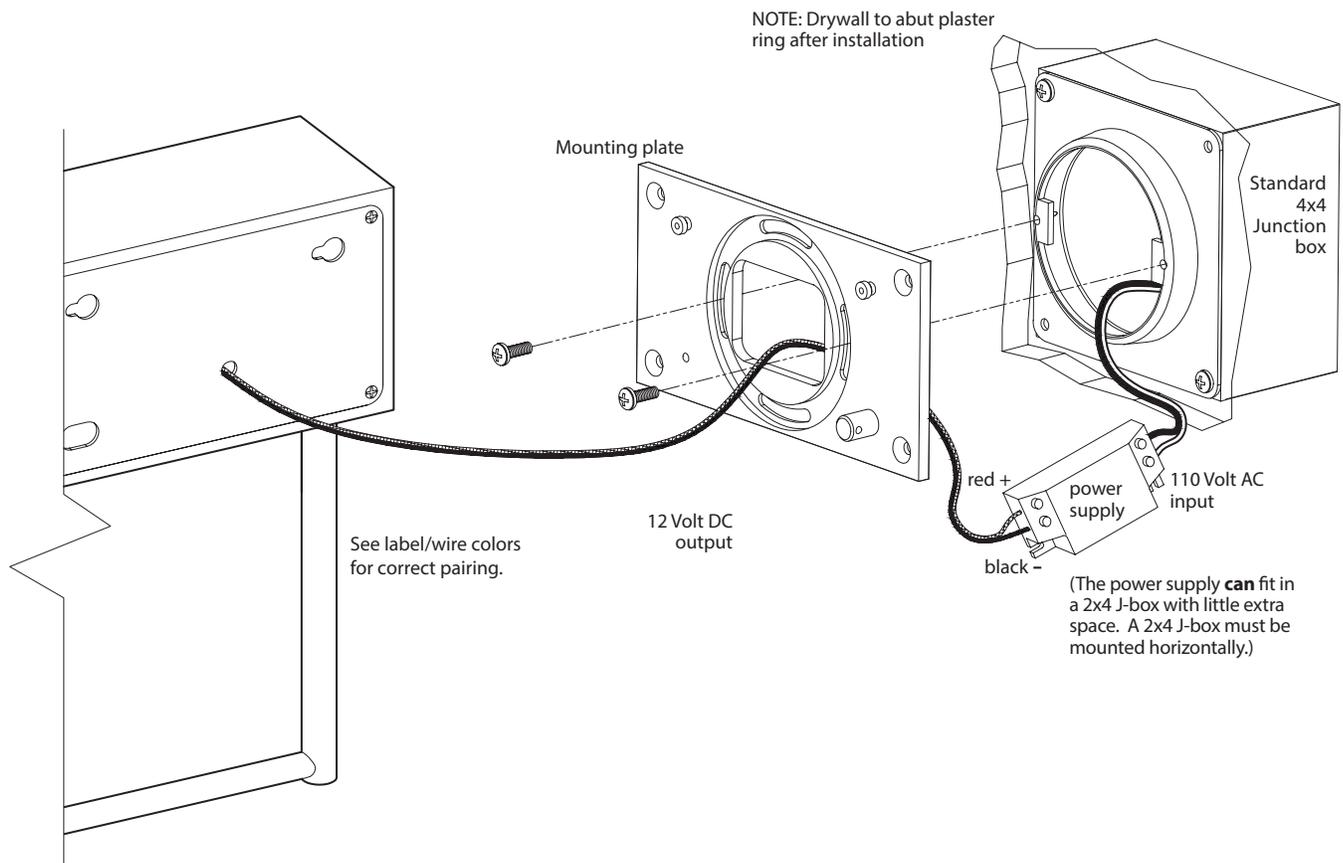

## Cubo operation considerations

- For indoor mounting locations only.
- When the light head is stowed in resting position it can be turned toward the wall or toward the light diffusing polymer to achieve the desired effect.
- The solid wood Cubo body should be re-oiled every 1-3 years to maintain the rich wood sheen.
- The solid wood Cubo body should be cleaned with a high quality furniture cleaner.
- Knob must be clicked on for light source to work. Make sure to fully turn off fixture by rotating dimmer knob in clockwise direction until click occurs.

## Care, maintenance instructions

Regularly maintaining your Cerno® product is easy and will help keep it looking beautiful. Scratches can be buffed out in minutes. Wood surfaces will be revitalized with minimal effort every few years. The LED light source is rated to last 50,000 hours, and should last the life of the product. Your fixture may include materials listed below. Please use these tips to keep your product looking its best.

**Oiled Walnut:** Wood surfaces should be dusted and cleaned with a damp cloth. Every 1 - 3 years, re-oil and wax wood surfaces to maintain the rich wood sheen. Remember to wipe with the wood grain, and remove any excess oil or wax when finished.

**Brushed Aluminum:** Everyday cleaning of metal surfaces can be done with a damp cloth. Repair: To remove scratches from brushed aluminum, use Scotch-Brite (Gray or Maroon) to buff the scratched area. In a pinch, you can use the rough side of your kitchen sponge.

**Polymer:** To clean polymer surfaces, use a damp cloth with soap and water or typical cleaners. Avoid heavy-duty cleaners (i.e. anything solvent-based), as they can damage the material. Repair: Scratches can be buffed out of polymer surfaces using 200 - 300 grit sandpaper.

### **Cerno's mission since the company's inception has been to fuse quality, performance and resource efficiency with contemporary design.**

Producing environmentally responsible products involves far more details than merely guaranteeing your products energy efficient performance and maintaining eco conscious manufacturing practices. We live in a consumer age characterized by excess and waste, where nearly everything we possess is viewed as disposable, from the cars we drive to the bottle of water you are drinking right now.

At Cerno we aim to provide our customers an opportunity to purchase objects of value to enhance their built environment. We construct our products with integrity that will pass the test of time with the goal of evading a premature trip to the local landfill. All the products are assembled by human hands and endure rigorous testing to assure that our exceptionally high standards of quality are always satisfied.

### **Warranty**

In addition to our two year product defect warranty, Cerno offers a repair service for the life of your product. Every Cerno product is designed and manufactured in the United States which facilitates excellent quality control and easy access to our engineers and service technicians. At Cerno we pride ourselves on delivering products executed with an unparalleled level of craftsmanship. For any reason should our customers have an issue with their orders upon delivery we will repair or replace the item.

In addition to our warranty and quality guarantees, Cerno welcomes customer feedback so please e-mail all comments to [info@cernogroup.com](mailto:info@cernogroup.com)